






# SUNDANCE KOOLFAB

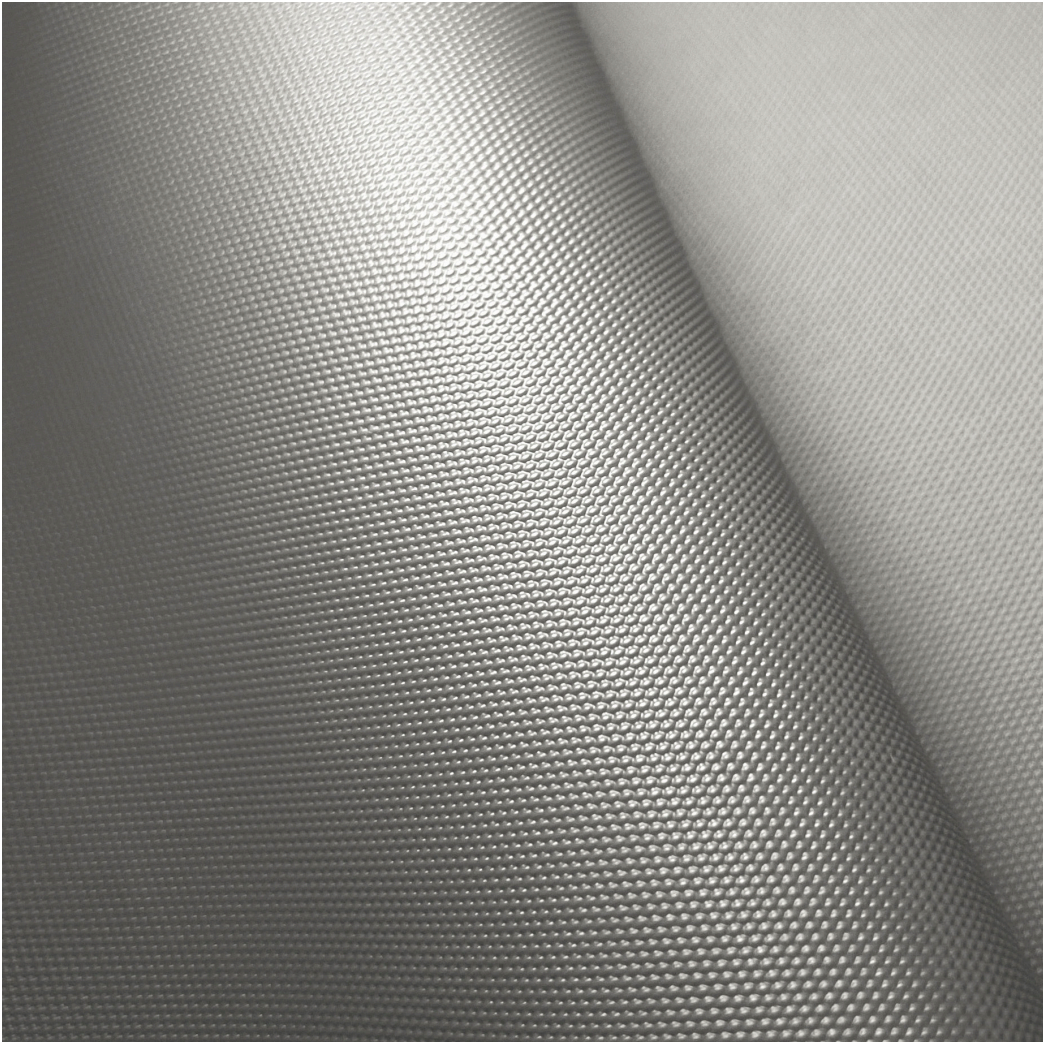


**SDK-802**  
Warm Grey



**SDK-801**  
Buckskin




**SDK-808**  
Java




**SDK-807**  
Cedar




**SDK-810**  
Jet




**SDK-806**  
Hemlock




**SDK-805**  
Legion Blue



**SDK-804**  
Scandi Blue



**SDK-803**  
Slate



**SDK-809**  
Aubergine

## Specifications

- Roll Width: 54 inches
- Roll Length: 40 linear yards
- Weight: 30.8+/-2 oz per linear yard
- Thickness: 39+/-4 mils
- Cold Crack: -25°F

## Abrasion Resistance

Martindale; 300,000 Cycles Pass no significant wear.

## Feature and Benefits

Mildew resistant, Made in North America, Bromine-free, No halogenated flame, Retardants (HFRs), REACH compliant, RoHS compliant, Non toxic, No heavy metals, No mercury, No bisphenol A (BPA), No ozone depleting chemicals, No PBT's (persistent bio accumulative and toxic chemicals), Contains bio-based renewable ingredients, Formulated without ortho-phthalates, 650 Hours QUV, Formulated phthalate free, Denim dye resistant, Cleanable

## Flame Resistance

Manufactured to meet the following flammability\* requirements:

- EN 1021-1 and 2
- ISO 3795  $\leq 4''/\text{min}$
- IMO MSC 88/26/ADD, 2PART 8 (3,1 and 3,2)
- NF P 92-503, M2
- Title 14 CFR, Part 25, Appendix F, Part 1 Paragraph a)91) (ii)(25-853) ASTM D6413, Flame time:  $\leq 15$  seconds, Burn Length:  $\leq 8$  in, Flaming drips:  $\leq 5$  seconds
- DN 4102-1, B2

\*This term and corresponding data refer to the typical performance in the specific test indicated. They should not be construed to imply the behaviour of this or any other material under actual fire conditions.

## Content and Backing

Vinyl, Backing: 100% Polyester Mellohide

## Recommended Applications

Automotive, Contract, Hospitality, Marine & Recreational Products, Marine Interior, Public Spaces, Residential/Home Office, Restaurant, RV, Trucking

\*The specifier must comply with all applicable building codes, as well as state and federal regulations.

## Care and Cleaning Instructions

This product has been developed to emulate the look and feel of soft leather. The unique super dull finish is designed to be low burnishing, non-polishing and resistant to ultraviolet exposure. Our vinyls have superb tailoring qualities, which make preheating and steaming unnecessary and are not recommended in the fabrication process. Because of the special leather-like finish, additional precautions should be observed when processing and cleaning. Please avoid contact with marking inks, glues and other staining materials that may damage vinyl during manufacturing. Protecting seating with a clean polyethylene cover, as is common in the automotive industry, should enable you to deliver a stain-free unit to the customer. If, despite all precautions, staining material does come in contact with our vinyls, cleaning should be immediate and should follow these instructions:

- Dry soil, Dust and Dirt, Dried on Dirt: Remove with soft cloth dampened with water.
- Variation in Surface Gloss: Wipe with a soft cloth dampened with water. Allow to air dry. Stubborn Dirt: Wash with a soft cloth moistened with a mild soap and water. Rinse with clean water.
- Stubborn Spots and Stains: Spray with either Formula 409®, or CRC 40173 Tannery Leather, Vinyl & More Cleaner & Conditioner, wiping with a soft cloth. Rinse with clean water.
- Liquid Spills: Wipe immediately with a clean absorbent cloth. Rinse with clean water.
- Food, Grease, and Oily Stains: Spray immediately using either Formula 409®, or CRC 40173 Tannery Leather, Vinyl & More Cleaner & Conditioner, wiping with a soft cloth.

Take care not to extend the area of contamination beyond its original boundary. Rinse with clean water.

Our vinyls should be periodically cleaned to maintain their appearance and prevent build-up of dirt and contaminants. Any stain, spill or soiling should be cleaned up promptly to prevent permanent staining. When cleaning, always rub gently.

\*Caution: Powdered abrasives, abrasive cleaners, and steel wool damage vinyl, as do strong solvents, lacquer solvents and inks. Lotions, suntan oil, waxes and polishes, etc., oils and dyes that can cause stiffening and staining of vinyls. Never use heat guns or hair dryers.

\*Note: Stronger cleaners, detergents, and solvents may be effective in stain removal but can cause either immediate damage or slow deterioration. Many such materials are wrongly recommended in marine and other related industries. The use of such cleaners is at the owner's own risk.

This information is offered for your general guidance only. It is accurate to the best of our knowledge at the time of printing, but it is not intended to relieve the user from their responsibility to investigate and understand other pertinent sources of information and to comply with the laws and procedures applicable to the safe handling and use of this material.



↗ Morbern.com

Morbern  
Corporate Headquarters  
80 Boundary Road  
Cornwall, ON K6H-6M1  
Canada  
888-MORBERN

Morbern  
US Headquarters  
401 Fraley Road  
High Point, NC 27263  
United States  
888-MORBERN

Morbern is a premier North American manufacturer and innovator of decorative vinyl-coated fabrics. With a legacy spanning over half a century, we are dedicated to providing leading-edge design and engineered performance solutions in upholstery for sectors in Marine, Automotive, Recreational Vehicles, Mass Transportation, Corporate, Healthcare, Hospitality, and other diverse seating markets.

© 2025 Morbern™ | Morbern is an ISO 14001 : 2015 Certified Producer